

WARNING

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION.
Please read the instructions before installation and use.

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and the fixture box and fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician. Please abide by all relevant country, regional, and local code requirements and regulations when installing this luminaire. Wiring must be in accordance with NEC and all applicable local codes.
- DO NOT INSTALL DAMAGED PRODUCT! This luminaire has been properly packed so that no parts should have been damaged during transit. Inspect to confirm. Any part damaged or broken during or after assembly should be replaced.
- Do not make or alter any holes unnecessarily in an enclosure of wiring or electrical components during the installation.
- Turn off electrical power at the fuse or circuit breaker box before wiring fixture to the building power.
- Verify that supply voltage is correct by comparing it with the luminaire label information. Do not install with supply voltage that exceeds the rated input voltage of the luminaire.

- Caution
- Do not install in wet locations. For dry and damp use only.
 - Disconnect or turn off power before installation or servicing.
 - The electrical rating of this product is 120–277V. Installer must confirm that there is 120–277V at the fixture before installation.

Adjustable Surface Mount Installation

1

2

3


4

5


6

Turn off the main switch.


1. Discard the "A" part.

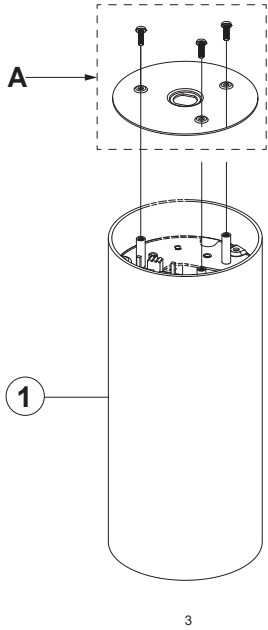

2. Align and mate the 2P and 3P terminals of Accessory 3 with those of the luminaire body, and then fasten Accessory 3 to the luminaire body with Accessory 4.

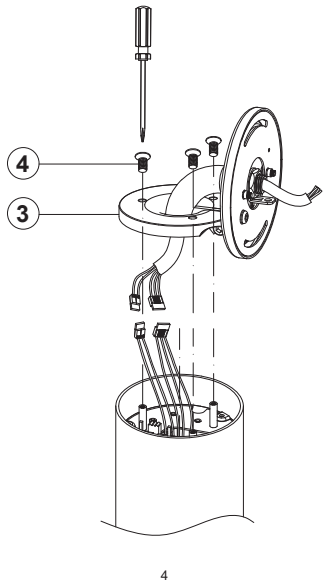

3. Secure Accessory 2 to the junction box with the screws supplied with the J-Box.

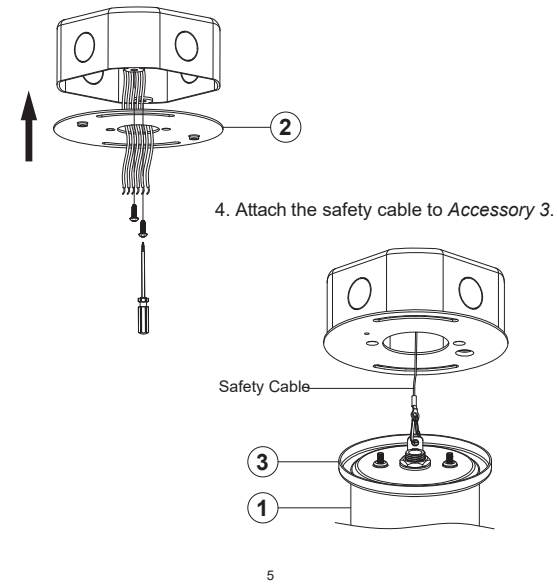

5. Connect the wires of Accessory 3 to the mains with Accessory 6.

WIRING DIAGRAM

LINE

NEUTRAL

GROUND

DIM (+)

DIM (-)

BLACK


WHITE

GREEN


PURPLE

PINK

6. Tuck the wires into the junction box, align the holes of Accessory 3 and 2, and then fasten them together with Accessory 5.

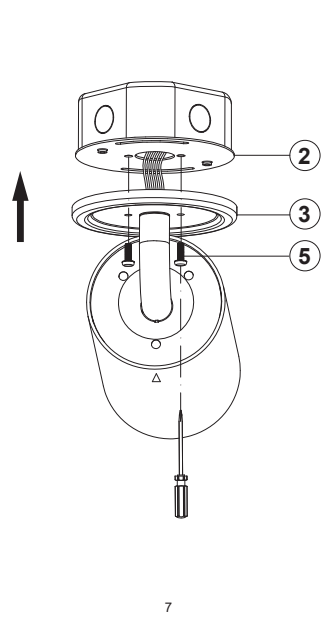

7. The installation is complete. Turn on the main switch.

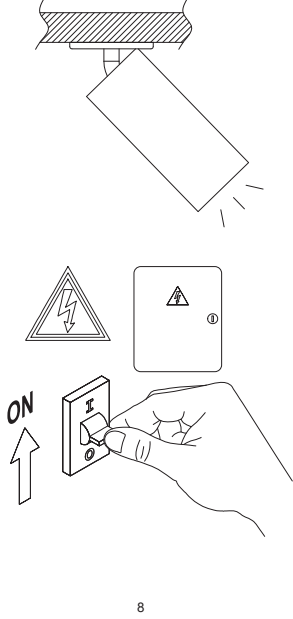

Cord Pendant Mount Installaion

1

2

3

4

5

6


7

8

9

Turn off the main switch.

1. Take out the "A" part for later use. 2. Cut the bare end of Accessory 2 to the desired length. (Skip this step if no cutting is required.)

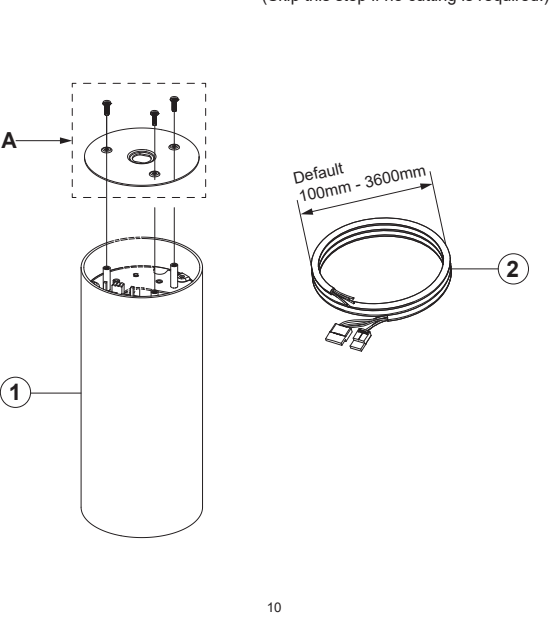


3. Fasten part "A" to Accessory 3 with 8. Then, feed Accessory 2 sequentially through one Accessory 7, the assembly, Accessory 9, 4, 5, and the other Accessory 7. Finally, tighten both Accessory 7 units.

Before use, knock out the holes on the opposite side.

Conduit canopy for surface-mounted J-Box option

4. Align and mate the 2P and 3P terminals of Accessory 2 with those of the luminaire body. Fasten the assembly to the luminaire body with the screws of part "A".

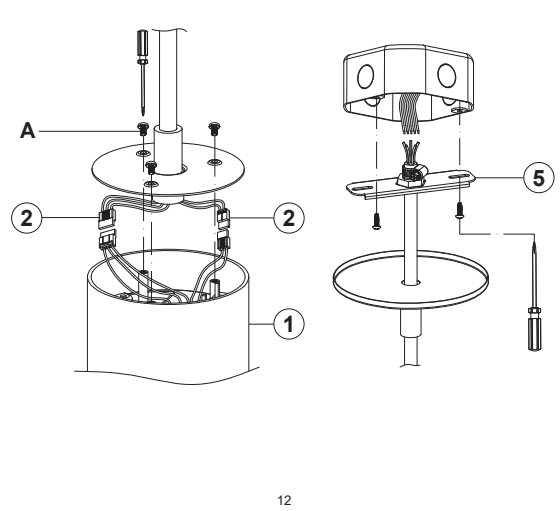

6. Connect Accessory 2 to the mains with Accessory 6.

WIRING DIAGRAM

LINE

NEUTRAL

GROUND

DIM (+)

DIM (-)

BLACK


WHITE

GREEN


PURPLE

PINK


7. Tuck the wires into the J-Box, and then lift Accessory 4 and tighten Accessory 9 clockwise to secure Accessory 4 in place.

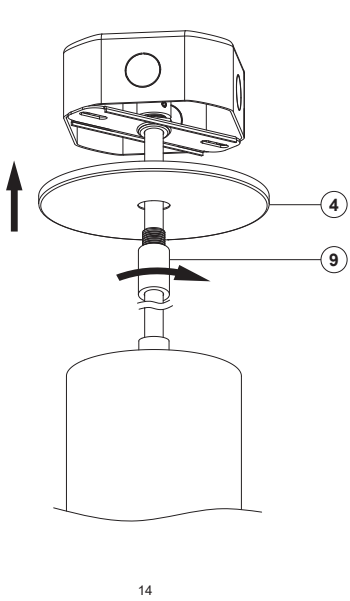

8. The installation is complete. Turn on the main switch.

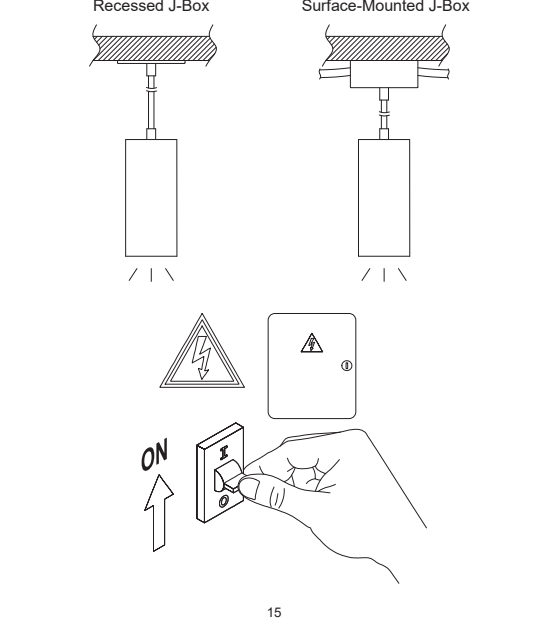


Stem Pendant Mount Installaion

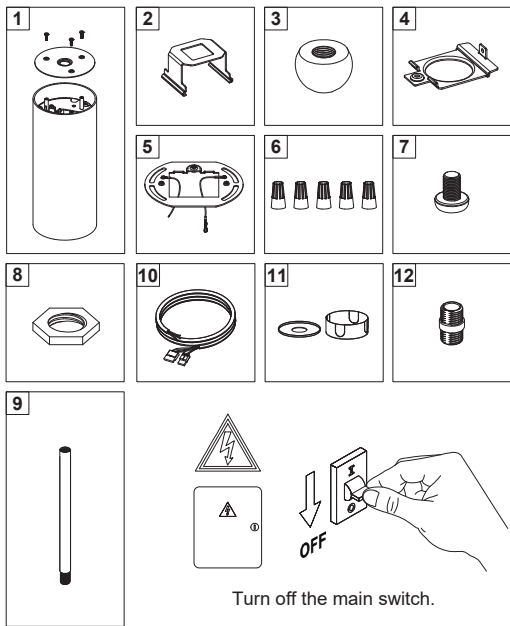


16

1. Take out the "A" part for later use.

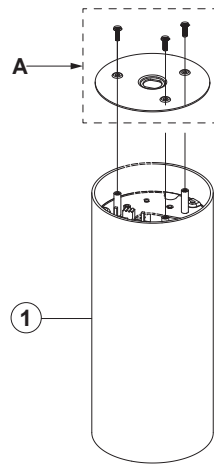


17

2. Fasten part "A" to Accessory 12 with 8, tighten Accessory 9 onto the exposed portion of Accessory 12; Pass the other stem through 4 and 3, and screw the stem into 3 to secure Accessory 4 in place. Slide Accessory 2 into 4, and then pass Accessory 11 over the stem; Tighten the stems to join them and feed Accessory 10 through the assembly.

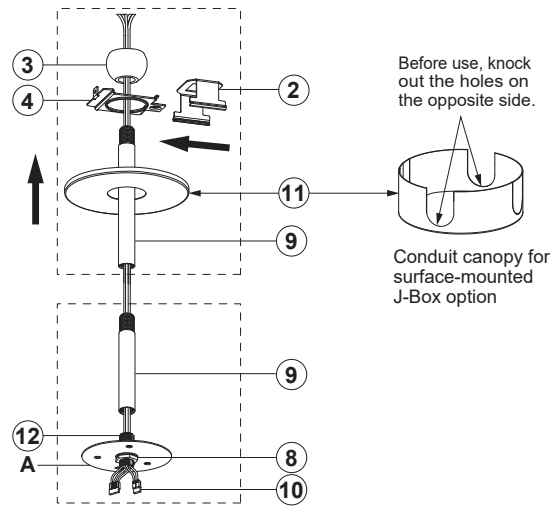


18

3. Align and mate the 2P and 3P terminals of Accessory 10 with those of the luminaire body. Fasten the assembly to the luminaire body with the screws of part "A".

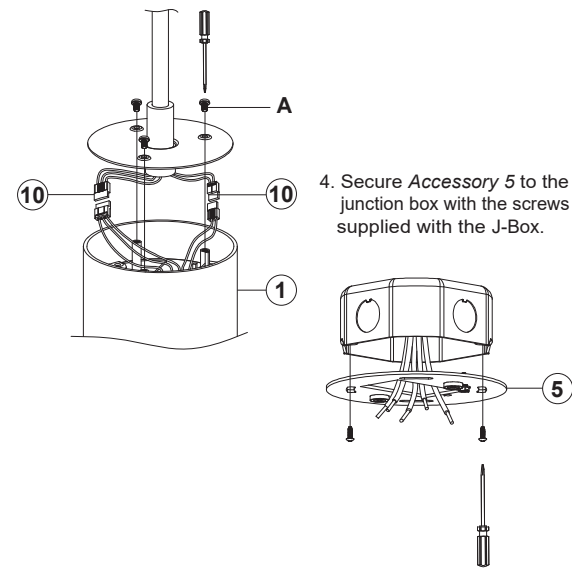


19

5. Attach the safety cable to Accessory 4.

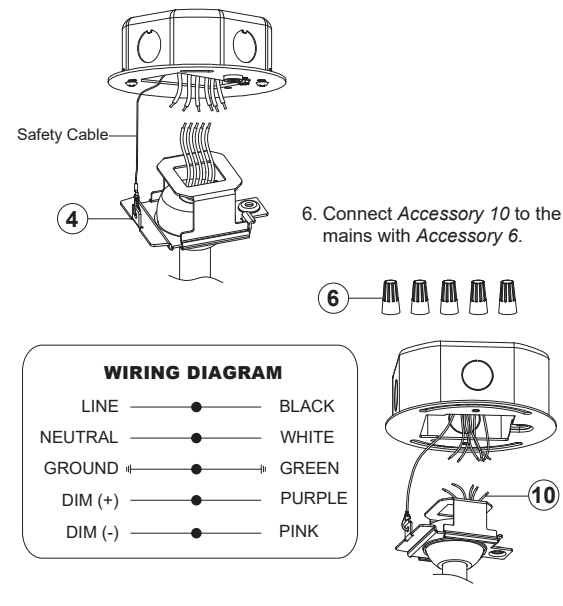


20

7. Place Accessory 4 into 5 in direction A, then push it left in direction B, upward in direction C, and finally right in direction D.

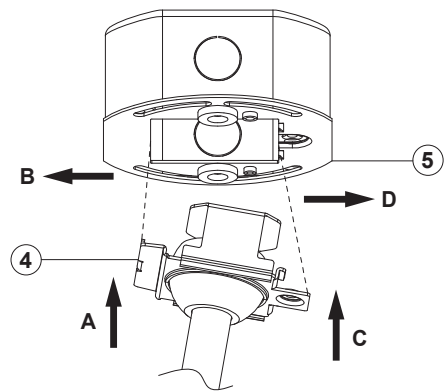


21

8. Fasten Accessory 4 to 5 with 7.

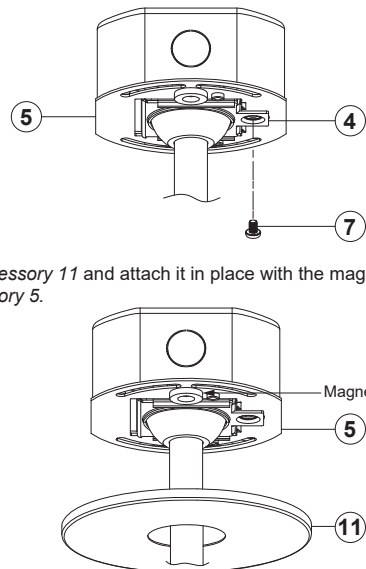


22

9. Lift Accessory 11 and attach it in place with the magnet on Accessory 5.

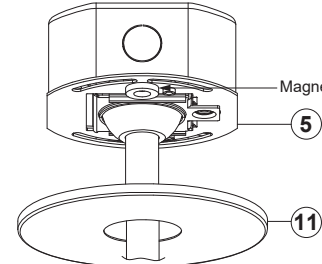


10. The installation is complete. Turn on the main switch.

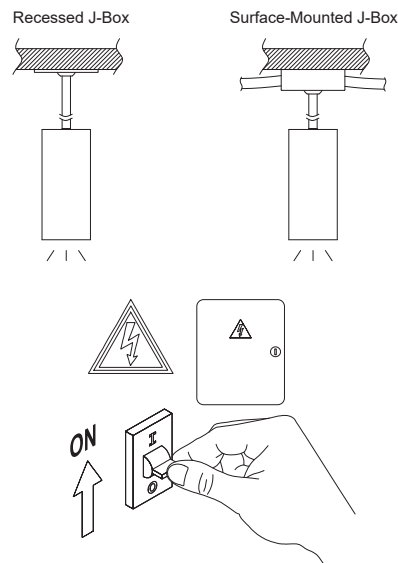


23

Surface Mount Installation

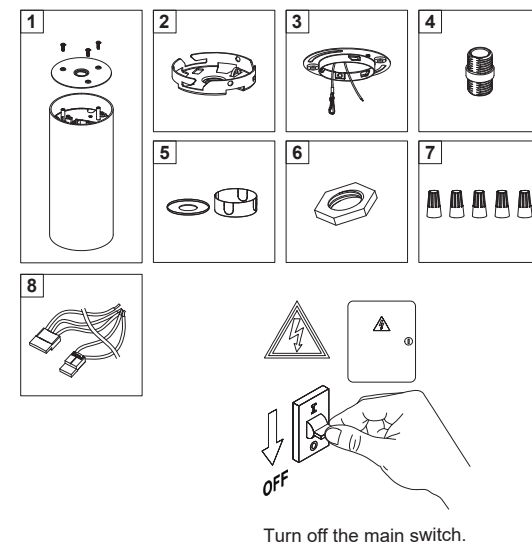

24


1. Take out the "A" part.

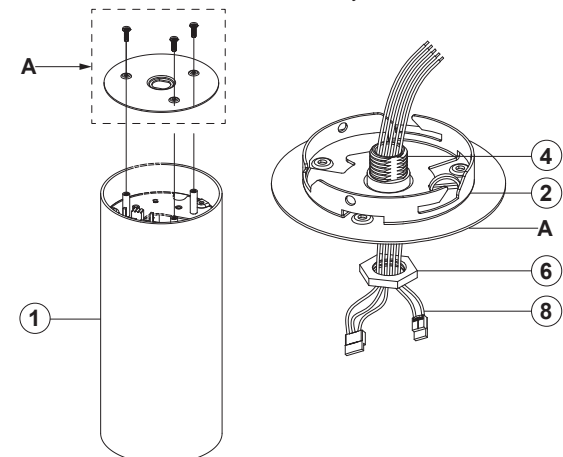

25


2. Insert Accessory 4 into the holes of Accessory 2 and part "A", secure them by screwing Accessory 6 onto the exposed end of Accessory 4. Feed Accessory 8 through the assembly.

3. Align and mate the 2P and 3P terminals of Accessory 8 with those of the luminaire body. Fasten the assembly to the luminaire body with the screws of part "A".

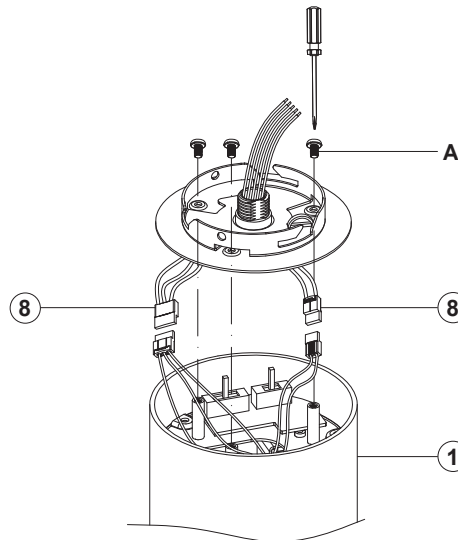

26


4. Secure Accessory 3 to the junction box with the screws supplied with the J-Box.

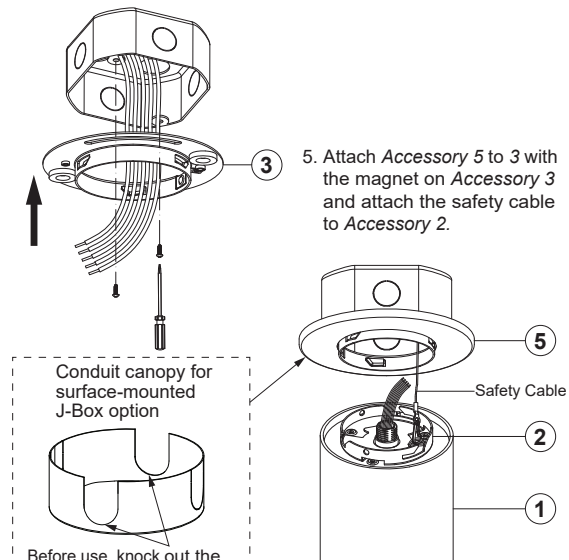

27


5. Attach Accessory 5 to 3 with the magnet on Accessory 3 and attach the safety cable to Accessory 2.

6. Connect Accessory 8 to the mains with Accessory 7.

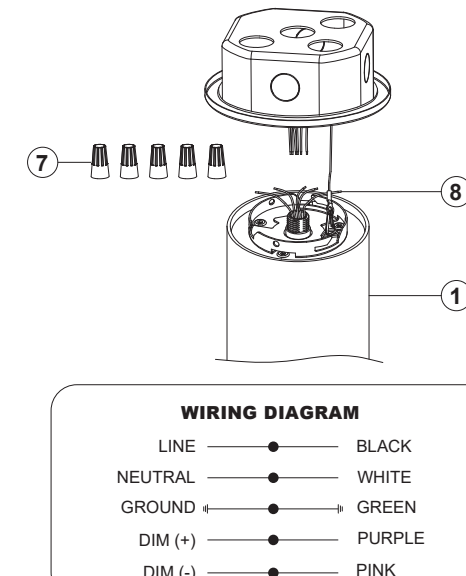


28

7. Align Accessory 2 with Accessory 3 at their locking points, push the luminaire body fully upward, and then rotate it clockwise to secure it in place.

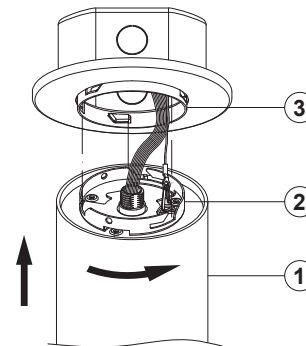

29

8. The installation is complete. Turn on the main switch.

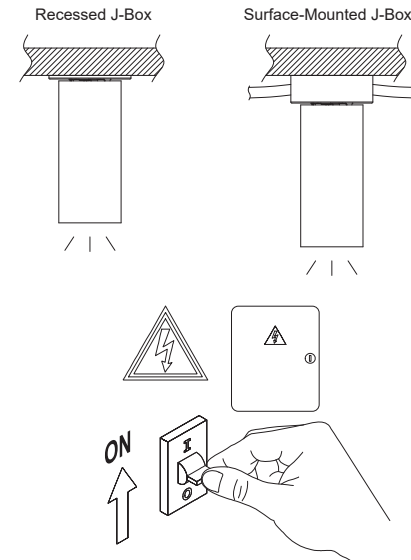

30