

CYN | Pendant Ambient Luminaire

Overview

Cyn is a sleek, performance cylinder designed to amplify the atmosphere of any space it enters. Define your vibe with lighting solutions that buck tradition and turn heads. Contact your lighting solutions dealer today and start living.

Part #:

CYN | Pendant Cylinder

Lumens:

2.5 Inch Round:

500 Lm (5 W)

1,000 Lm (10 W)

1,500 Lm (15 W)

4 Inch Round:

1,000 Lm (10W)

2,000 Lm (20W)

2,500 Lm (25W)

6 Inch Round:

2,000 Lm (20W)

3,000 Lm (30W)

4,000 Lm (40W)

Color:

CCT: (Standard)

2700K

3000K

3500K

4000K

5000K

CCT: (Dim to Warm)

1800K -

3000K

CRI:

90

Voltage:

Standard:

120-277 V

Voltage:

Standard:

120-277V

Dimming:

Standard:

Three In One (0-10V,

TRIAC, ELV)

Dim to Warm

Lifetime:

Standard:

L80 > 50,000 Hrs.

Operating Temperature:

Standard:

-4°F - 104°F

Finishes:

Phantom black

Wispy white

Specter silver grey

Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



CYN

Suspended Mount

Features:

Your style, your way

Choose from numerous mounting options and styles to suit your needs.


Bend the light to your whims

Three In One dimming driver allows for 0-10V, TRIAC, and ELV dimming.

Adjustable optics allows for 18°, 24°, 36°, and 50° beam angles.


Aluminum housing and performance light engine

High quality, precision housing paired with a long lasting light engine.

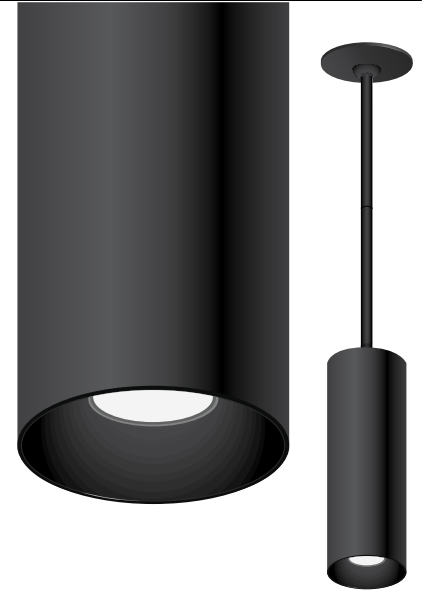


Trim:


Standard:



Standard Vortex Baffle




Cross Baffle




Wall Wash Baffle

Lens:


Standard



Soft Lens




Linear Spread




Hex Louver

Wall Wash



Soft Wall Wash



Double Sided Wall Wash

Optics:


Photometry:



18° Flood



24° Flood




36° Flood




50° Flood

Also available in:



Surface Mount



Adjustable
Surface Mount

Type:	Project:	Submitted by:	Date:
Ordering information:			

CYN | Pendant Ambient Luminaire

Example: CYN PC 6 4020 940K D36 VB WH WH

Ordering Guide:
Use the buttons below to build out a product number.

Body and mounting				Output / CCT / Electrical				
Series	Mount	Length	Size	Power Universal dimming (0-10V, TRIAC, and ELV)	Power Dim to warm (1800K - 3000K)	CCT/CRI	Distribution	Voltage
CYN Cyn - Suspended Cylinder	PC Pendant - Cord PS Pendant - Stem	-----* Pendant length - 1" increments only *Power cables available in 7' or 12' lengths. All lengths over 12' require special order.	25	05	05-DW	927K	D18	BLANK
			2.5" Diameter	500 Lumens / 5W (2.5" Only)	400 Lumens / 15W	90 CRI - 2700K	Very Narrow - 18°	120-277V
			40	10	10-DW	930K	Narrow - 24°	
			4" Diameter	1,000 Lumens / 10W (2.5" or 4")	800 Lumens / 10W	90 CRI - 3000K		
			60	15	15-DW	935K	Medium Narrow - 36°	
			6" Diameter	1,500 Lumens / 15W (2.5")	1,200 Lumens / 15W	90 CRI - 3500K		
				20		940K	Wide - 50°	
				2,000 Lumens / 20W (4" or 6")		90 CRI - 4000K		
				25		950K		
				2,500 Lumens / 25W (4" Only)		90 CRI - 5000K		
				30		9DWK		
				3,000 Lumens / 30W (6" Only)		90 CRI - Dim to warm 1800K - 3000K		
				40				
				4,000 Lumens / 40W (6" Only)				


Hard Optics		Finishing		Controls
Baffle	Baffle Color	Lens	Finish*	Emergency
VB	BK	BLANK	BK	EM
Standard baffle	Black	Standard clear lens	Phantom black	Battery back up
CB	WH	HL	WH	
Cross baffle	White	Hex louver	Wispy white	
WB*	SG**	SF	SG	
Wall wash - Metallic silver finish only (2.5" or 4" Only)	Silver grey	Softening lens	Specter silver grey	
	SL	LS	-----**	
	Metallic silver (Only available for wall wash)	Linear spread	RAL color code	
	-----	SW		
	RAL color code	Single side wall wash		
		DW		
		Double side wall wash		
*Wall wash available for 2.5" and 4" cylinders only.		*Power cable, stems, and mounting kits will match cylinder finish.		
**Silver grey cross baffle requires MOQ and advanced lead time.		**Custom color requires MOQ and advanced leadtimes.		

CYN | Pendant Ambient Luminaire

Performance Data:

Power	Size	2700K (90 CRI)		3000K (90 CRI)		3500K (90 CRI)		4000K (90 CRI)		5000K (90 CRI)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
15W	2.5 IN	1,430 LM	95 LM/W	1,430 LM	95 LM/W	1,430 LM	95 LM/W	1,500 LM	100 LM/W	1,500 LM	100 LM/W
25W	4 IN	2,400 LM	96 LM/W	2,400 LM	96 LM/W	2,400 LM	96 LM/W	2,500 LM	100 LM/W	2,500 LM	100 LM/W
40W	6 IN	3,800 LM	85 LM/W	3,800 LM	95 LM/W	3,800 LM	95 LM/W	4,000 LM	100 LM/W	4,000 LM	100 LM/W

Dimensions:

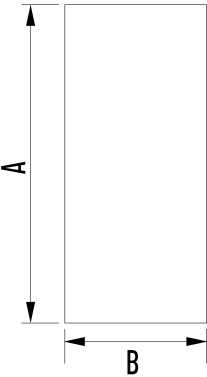

Size	Height (A)	Width (B)
3 IN ROUND	8.3 IN	2.87 IN
4 IN ROUND	8.3 IN	3.7 IN
6 IN ROUND	10 IN	5.9 IN

Mounting:

