

⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.
Please read the instructions before installation and use.

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions and other hazards, read all warnings and instructions included with and the fixture box and fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician. Please abide by all relevant country, regional, and local code requirements and regulations when installing this luminaire. Wiring must be in accordance with NEC and all applicable local codes.
- **DO NOT INSTALL DAMAGED PRODUCT!** This luminaire has been properly packed so that no parts should have been damaged during transit. Inspect to confirm. Any part damaged or broken during or after assembly should be replaced.
- Do not make or alter any holes unnecessarily in an enclosure of wiring or electrical components during the installation.
- Turn off electrical power at the fuse or circuit breaker box before wiring fixture to the building power.
- Verify that supply voltage is correct by comparing it with the luminaire label information. Do not install with supply voltage that exceeds the rated input voltage of the luminaire.

Caution

- Do not install in wet locations. For dry and damp use only.
- The electrical rating of this product is 120–277V. Installer must confirm that there is 120–277V at the fixture before installation.
- Disconnect or turn off power before installation or servicing.

WALL MOUNT INSTALLATION

Mounting Accessories

1

2

Mounting Plate x1

3

Wall Canopyx1

4

Wall-Mount Bracket x1

5

Screw x2

6

Black Screw x2

7

Wire Nut x5

Mounting with 4" J-Box

1 Turn off the mains power switch.

2 Secure *Accessory 2* to the 4" J-Box with the screws supplied with the J-Box.

3 Align the holes of *Accessory 4*, 3, and 2, then fasten them together with *Accessory 5*.

4 Connect the mains to the wires of the luminaire body with *Accessory 7*.


LINE	●	BLACK
NEUTRAL	●	WHITE
GROUND	⬮	GREEN
DIM (+)	●	PURPLE
DIM (-)	●	PINK

5 Align the arrow-marked side of the luminaire body with the bracket, then secure it in place with *Accessory 6*.


6 The installation is complete.

Mounting with 2x4" J-Box

1 Turn off the mains power switch. Secure *Accessory 4* to the 2x4" J-Box with the screws supplied with the J-Box.

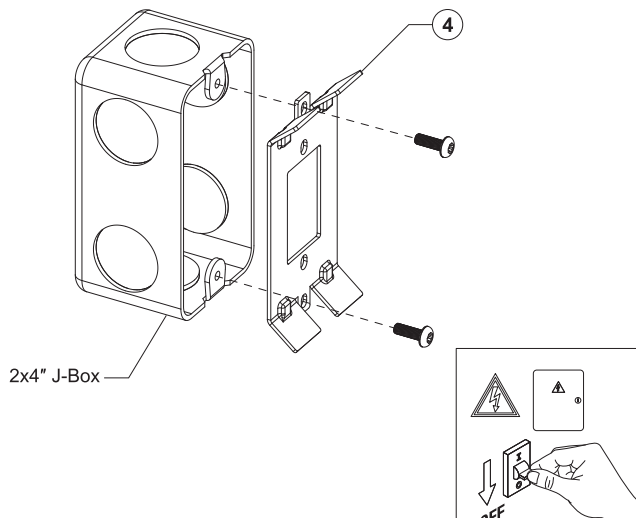


2 Connect the mains to the wires of the luminaire body with *Accessory 7*.

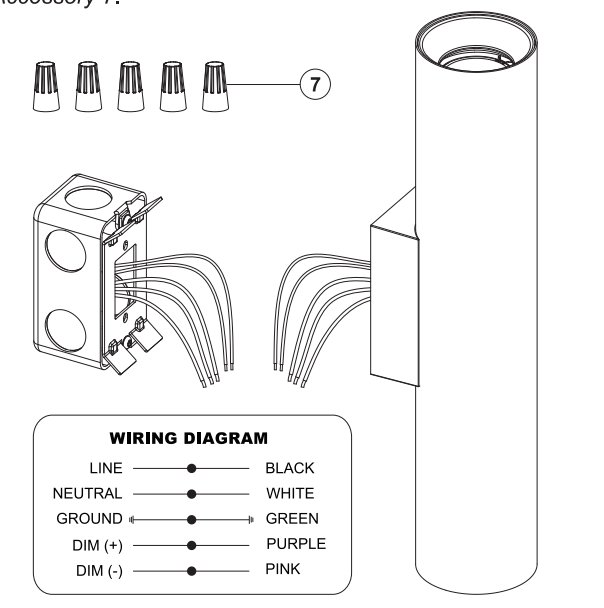


LINE	●	BLACK
NEUTRAL	●	WHITE
GROUND	●	GREEN
DIM (+)	●	PURPLE
DIM (-)	●	PINK

3 Align the arrow-marked side of the luminaire body with the bracket, then secure it in place with *Accessory 6*.

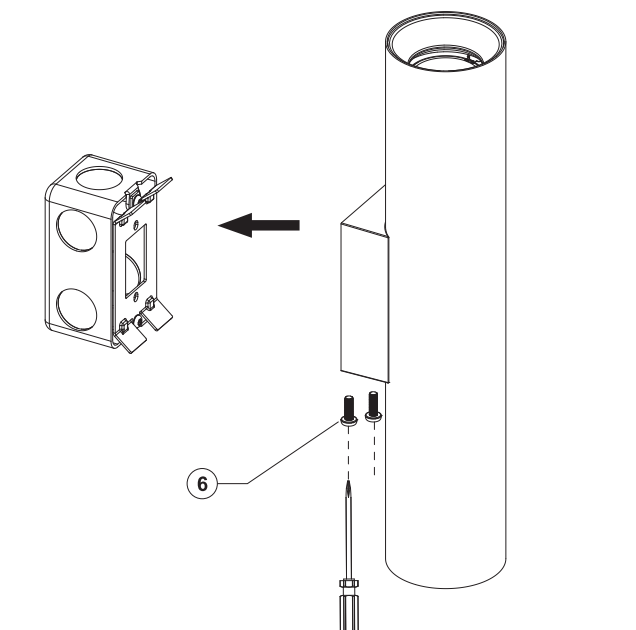


4 The installation is complete.

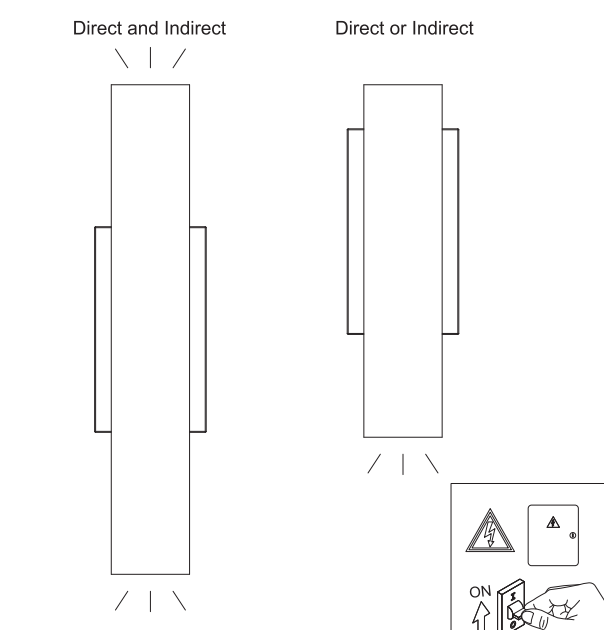

CORD PENDANT MOUNT INSTALLATION

1

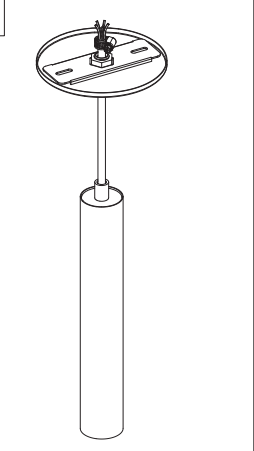


2

Wire Nut x5




3


Conduit Canopy x1

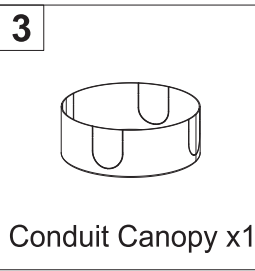


1 Turn off the mains power switch.

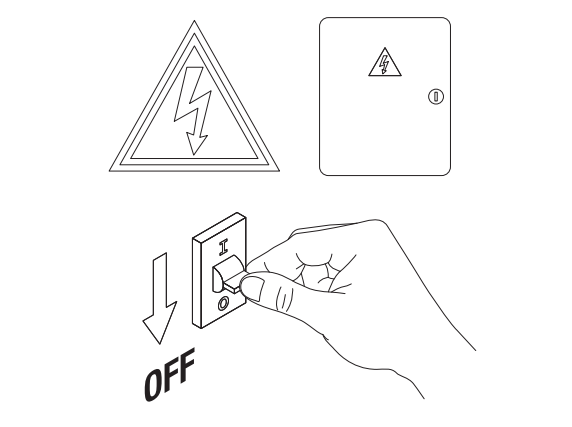


2 Loosen the threaded stem in a counterclockwise direction.

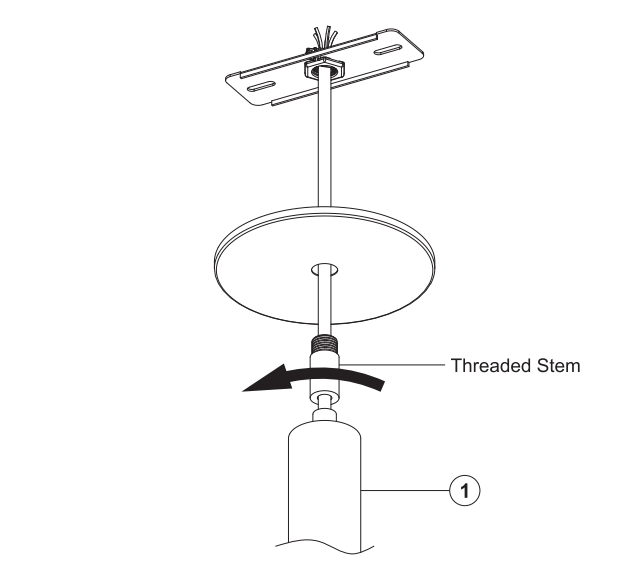

3 Secure the mounting bracket to the J-Box with the screws supplied with the J-Box.

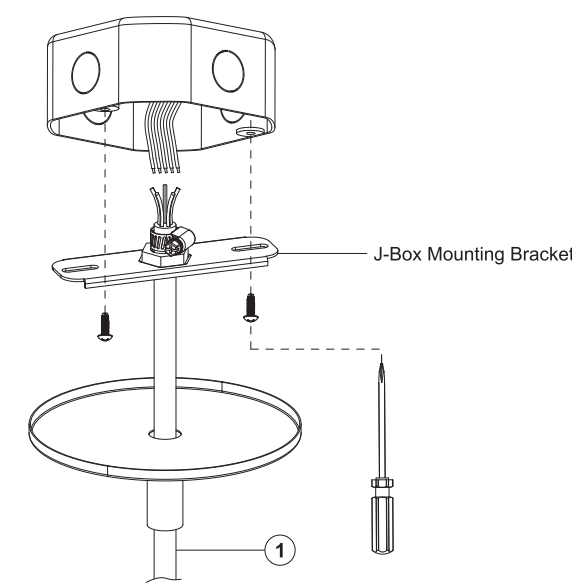


4 Connect the mains to the wires of the luminaire body with *Accessory 2*.

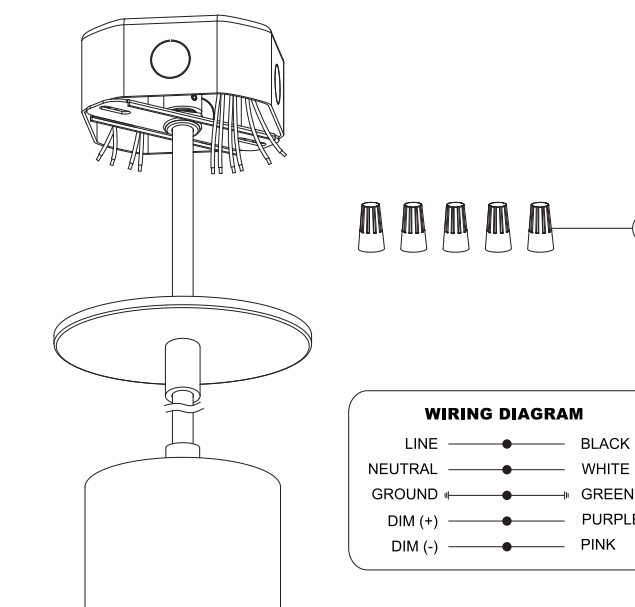

LINE	●	BLACK
NEUTRAL	●	WHITE
GROUND	●	GREEN
DIM (+)	●	PURPLE
DIM (-)	●	PINK

5 Tuck the wires into the J-Box. Then, lift the canopy—either the one supplied with the luminaire or *Accessory 3*—and tighten the threaded stem clockwise to secure the canopy in place.

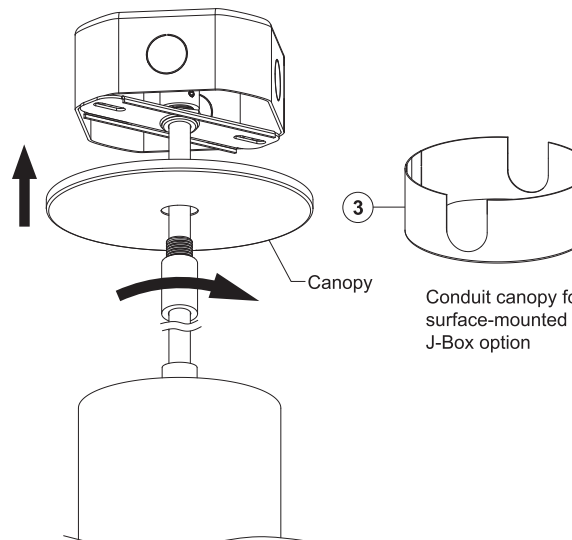

6 The installation is complete.

