

SWL G1 | Wall Mount Architectural Luminaire

Overview

The Firefly is a sleek, architectural light designed to amplify the atmosphere of any space it enters. Define your vibe with lighting solutions that buck tradition and turn heads. Contact your lighting solutions dealer today and start living.

Part #:

SWL G1 | Wall Mount Architectural Luminaire

Lumens:

1FT:	2FT:
750 Lm / 7.5 W	2,000 Lm / 20 W
1,000 Lm / 10 W	2,500 Lm / 25 W
1,500 Lm / 15 W	3,000 Lm / 30 W

Color:

CCT:	CRI:
3000K	90
3500K	
4000K	

Voltage:

Standard:
120-277 V

Voltage:

Standard:
120-277V

Dimming:

Standard:
0-10V

Lifetime:

Standard:
L80 > 237,000 Hrs.

Operating Temperature:

Standard:
-13°F to 122°F

Finishes:

	
Midnight (RAL 9005)	Pearly Gate (RAL 9016)


Smokey Gray (Special Order - RAL 7001)



Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



FIREFLY

Wall Mount

Features:

As above, as below
Indirect/Direct light output.


Visually striking

Thin, low glare lighting with an interior design form. Slice the visual plane with the Firefly series from SPRNG Architectural Lighting.

Pathway / Wayfinding

Direct your ambiance with the perfect leading luminaire. A smooth, sleek finish with a sliver of even illumination and brilliance.

Mounting:




Wall Mount

Finishes example:



Optics:


Photometry:




Up 40% (Batwing)
Down 60% (Omni)

Dimensions:


FIREFLY 1'

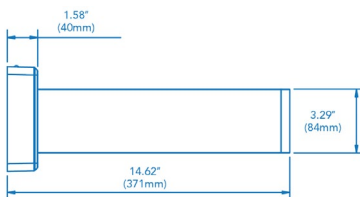

FIREFLY 2'

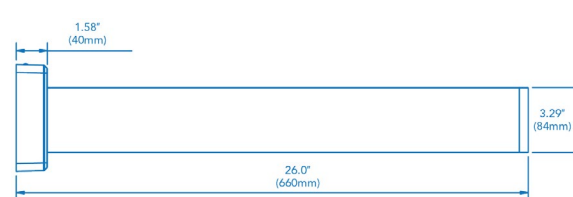

Wall base

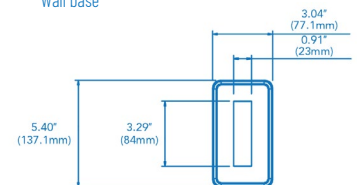

SWL G1 | Wall Mount Architectural Luminaire

Example: SWL G1 ID 24-30 940K WM BLK

Ordering Guide:
Use the buttons below to build out a product number.


Fixture Body		Output and color			Electrical		Mounting	Finishing
Series	Generation	Distribution	Length & Lumens	CCT/CRI	Voltage	Driver	Mounting	Finish
SWL <i>Firefly - Slim Architectural Wall Light</i>	G1 <i>First Generation</i>	ID <i>Indirect and Direct</i>	12 - 7 2' Linear - 750 Lm / 7.5 W 12 - 10 2' Linear - 1,000 Lm / 10 W 12 - 15 2' Linear - 1,500 Lm / 15 W <hr/> 24 - 20 4' Linear - 2,000 Lm / 20 W 24 - 25 4' Linear - 2,500 Lm / 25 W 24 - 30 4' Linear - 3,000 Lm / 30 W	930K 90 CRI - 3000K 935K 90 CRI - 3500K 940K 90 CRI - 4000K	120V-277V	BLANK 0-10V, 5% DIM1 0-10V, 1%	WM <i>Wall Mount</i>	BLK <i>Midnight black</i> WH <i>Pearly gate white</i> SG* <i>Smokey gray</i> <hr/> *RAL color code

Performance Data:

Series Number	Power Setting	Wattage	Lumens	CCT (90 CRI)
SWL 12	Max	15 W	1,500 Lm	3000K 3500K 4000K
	Medium	10 W	1,000 Lm	
	Low	7.5 W	750 Lm	
SWL 24	Max	30 W	3,000 Lm	
	Medium	25 W	2,500 Lm	
	Low	20 W	2,000 Lm	

Photometrics:


FIREFLY 1'

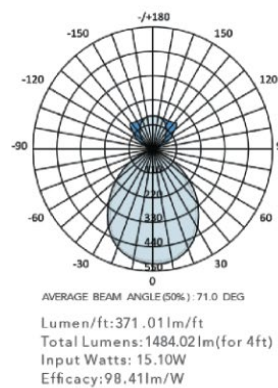

Zonal Flux Diagram						
Y	C0	C45	C90	C135	C180	
10	477.2	489.8	504.9	501.4	481.8	
20	363.4	410.9	463.1	435.9	370.9	
30	217.5	286.3	394.4	322.6	228.3	
40	111.7	172.9	306.8	207.6	123.0	
50	33.80	92.36	216.0	119.3	51.90	
60	9.857	28.51	131.5	64.37	16.86	
70	2.254	5.667	66.30	19.97	3.997	
80	1.379	1.881	20.52	2.802	1.805	
90	1.079	1.581	0.1724	1.739	1.271	
DEG	LUMINOUS INTENSITY: cd					

Zonal Lumens		
Y	Φ zone	Φ total
0-10	48.04	48.04
10-20	127.6	175.6
20-30	162.9	338.5
30-40	151.2	489.6
40-50	115.0	604.7
50-60	71.14	675.8
60-70	33.94	709.7
70-80	11.22	721.0
80-90	2.469	723.4

Luminance cd/m ²			
GD/EG	C0/180	C90/270	
85	135	594	
80	79	1182	
75	70	1580	
70	66	1939	
65	94	2269	
60	197	2629	
55	302	2991	
50	526	3360	
45	947	3697	

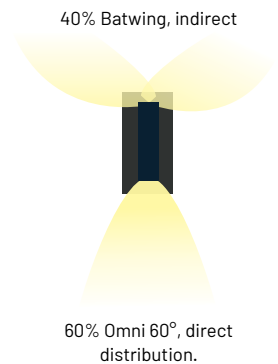

Shipping information:

Product number	Individual box size	Master Carton Size	Quantity In Master Carton
Firefly 1'	5.7" X 3.35" X 15.28"	18.11" X 15.94" X 12.2"	10 PCS
Firefly 2'	5.7" X 3.35" X 26.7"	27.36" X 10.83" X 12.2"	6 PCS

Fixtures ship 1 per box and specific dimensions may change without notice due to improvements.