

SSD G2 | Suspended Ambient Luminaire

Overview

Just as the heavens open up and deliver brilliance, the Serenity series from SPRNG Architectural Lighting offers even illumination and beautiful visual comfort. The open center design is a striking feature and commands a room, creating an environment of modern architectural cues.

Part #:

SSD G2 | Architectural Pendant Luminaire

Lumens:

8FT Length:
1,250 Lm per ft.
12.5 W per ft.

4FT Length:
1,250 Lm per ft.
12.5 W per ft.

2FT Length:
1,250 Lm per ft.
12.5 W per ft.

Color:

CCT:
3000K
3500K
4000K

CRI:
90

Voltage:

Standard:
120-277V

Dimming:

Standard:
0-10V, 1%

Lifetime:

Standard:
L70 > 237,000 Hrs.

Finishes:

Pearly Gate (RAL 9016) Midnight* (RAL 9005)

Custom color available*

*All Midnight and custom color requests must be call to order and will affect leadtimes. Accommodation for RAL color code is available.



SERENITY

Suspended Mount

Features:

Your size, your way
Choose from 2', 4' & 8' lengths standard.

Bend the light to your whims

30% uplight and 70% downlight distribution standard. Linkable with other SERENITY fixtures—7 units (2ft, 4ft), or 4 units (8ft) standard.

Mounting:




Suspended Drywall Mount



Suspended Drop ceiling Mount


Optics:

Photometry:



Up 30%, Down 70%

Accent examples:




Blue




Green



Red



Yellow



Fuchsia




Navy



Black



Gray



Stripes



Hornstooth



Pop Circles



Starry Night




Add your logo

Customization:

Linking for single power feed runs:

Fixture Length	Maximum number of linkable fixtures on a single power feed
2 FT	7 Units
4 FT	7 Units
8 FT	4 Units

Cross Section:

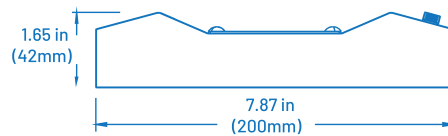

Type:	Project:	Submitted by:	Date:
Ordering information:			

SSD G2 | Suspended Ambient Luminaire

Example: SSD G2 P ID 4LS50 940K 120 S DIM-10 AA300 DC BLK

Ordering Guide:
Use the buttons below to build out a product number.

Luminaire Body				Output and color		Electrical		Finishing	
Series	Generation	Mount	Distribution	Length & Lumens	CCT/CRI	Voltage	Driver	Finish	Accent Finish
SSD <i>Serenity - Suspended Architectural Pendant Light</i>	G2 <i>2nd Generation</i>	SM-DW <i>Suspended mount - Dry wall</i> SM-DC <i>Suspended mount - Drop ceiling</i>	ID <i>30% Indirect and 70% Direct</i>	2-15 <i>2' Linear - 1,500 Lm / 15 W</i>	930K <i>90 CRI - 3000K</i>	120V - 277V	DIM-10 0-10V 10%	WH <i>Pearly gate white</i> BLK* <i>Midnight black</i> * <i>RAL color code</i>	BLANK <i>Matches the luminaire finish</i> A-WH* <i>White</i> A-BLK* <i>Black</i> A-BLU* <i>Blue</i> A-RD* <i>Red</i> A-GR* <i>Green</i> A-YL* <i>Yellow</i> A-PI* <i>Pink / fuchsia</i> A-NV* <i>Navy blue</i> A-GY* <i>Gray</i> A-OR* <i>Orange</i> A-GBK** <i>Glossy Black</i> A-STRIPE** <i>Black and white striped</i> A-HT** <i>Hornstooth</i> A-STAR** <i>Starry night</i> A-PCIRC** <i>Pop circle</i> A-CUSTOM*** <i>Custom logo</i>
				2-20 <i>2' Linear - 2,000 Lm / 20 W</i>	935K <i>90 CRI - 3500K</i>				
				2-25 <i>2' Linear - 2,500 Lm / 25 W</i>	940K <i>90 CRI - 4000K</i>				
				4-30 <i>4' Linear - 3,000 Lm / 30 W</i>					
				4-40 <i>4' Linear - 4,000 Lm / 40 W</i>					
				4-50 <i>4' Linear - 5,000 Lm / 50 W</i>					
				8-60 <i>8' Linear - 6,000 Lm / 60 W</i>					
				8-80 <i>8' Linear - 8,000 Lm / 80 W</i>					
				8-100 <i>8' Linear - 10,000 Lm / 100 W</i>					



Performance Data:

Series Number	Power Setting	Wattage	Lumens	CCT
SSD 2'	Max	25 W	2,500 Lm	3000K 3500K 4000K
	Medium	20 W	2,000 Lm	
	Low	15 W	1,500 Lm	
SSD 4'	Max	50 W	5,000 Lm	
	Medium	40 W	4,000 Lm	
	Low	30 W	3,000 Lm	
SSD 8'	Max	100 W	10,000 Lm	
	Medium	80 W	8,000 Lm	
	Low	60 W	6,000 Lm	

SSD G2 | Suspended Ambient Luminaire

Dimensions:


Serenity - Side/Interior View

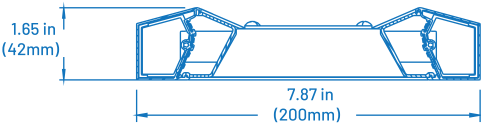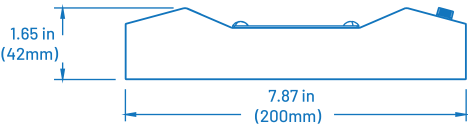

Serenity - 2FT



Serenity - 4FT



Serenity - 8FT

