

HRZN25I | Pendant Ambient Luminaire

Overview

Horizon 2.5 is a sleek, performance linear designed to amplify the atmosphere of any space it enters. Define your vibe with lighting solutions that buck tradition and turn heads. Contact your lighting solutions dealer today and start living.

Part #:

HRZN25I | Architectural Linear Luminaire

Lumens:

High Lumen:
650 Lm per ft.
5 W per ft.

Med Lumen:
488 Lm per ft.
3.75 W per ft.

Low Lumen:
325 Lm per ft.
2.5 W per ft.

Color:

CCT:
2700K
3000K
3500K
4000K
5000K
Tunable White (2700K-5000K)
Bluetooth (2700K-5000K)
Dim to Warm (1800K-3000K)

CRI:
90

Voltage:

Standard:
120-277 V

Dimming:

Standard:
0-10V - 5%

Options:
Dim to Warm,
Tunable
Bluetooth

Lifetime:

Standard:
L80 > 50,000 Hrs.

Operating Temperature:

Standard:
-4°F to 104°F

Finishes:

		
Midnight RAL 9005	Pearly Gate RAL 9016	Silver Gray RAL 7045


Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



HORIZON 2.5I

Indirect Linear - Suspended Mount

Features:

Your size, your way
Choose from standard lengths or customize to the foot.

Bend the light to your whims

Specific lumen outputs, 5 CCT + Dim to warm, dimming options, and 90 CRI standard.


Specification grade construction

Extruded aluminium housing and die cast endcaps. No shortcuts on material.

Lens:




Indirect Batwing PC lens



Asymmetric

Also available in:

Recessed:




Surface Mount:






Wall Mount:



Optics:



Cross Section:



Type:	Project:	Submitted by:	Date:
Ordering information:			

HRZN25I | Pendant Ambient Luminaire

Example: HRZN25 I IF MI 940K BW FD DIM BL

Ordering Guide:
Use the buttons below to build out a product number.

Select one option per numbered section. if a preferred option is not here, please contact your local SPRNG representative for more information.

Linear Body			Output and color		
1 Series	2 Distribution	3 Total Length*	4 Output**	5 Voltage	6 CCT/CRI
HRZN25 Horizon 2.5 - Suspended Linear	I Indirect - Uplight	IF Individual Fixture Length CR Continuous Run (if over 8FT) CS Custom Shape (see 'Pattern Examples' for details). (**Please specify to the FT).	HI (High Indirect) 650 Lumens / 5 Watts per FT MI (Medium Indirect) 488 Lumens / 3.75 Watts per FT LI (Low Indirect) 325 Lumens / 2.5 Watts per FT * Indirect distribution only Outputs based on flat PC lens.	BLANK 120V-277V	927K 90 CRI - 2700K 930K 90 CRI - 3000K 935K 90 CRI - 3500K 940K 90 CRI - 4000K 950K 90 CRI - 5000K 9FSK 90 CRI - Tunable White/Bluetooth (2700K - 5000K) 9DTW 90 CRI - Dim to Warm (1800K - 3000K)

Hard Optics		Dimming		Finishing		Backups & Controls		Mounting	
7 Optics	8 Dimming	9 Finish	10 Emergency	11 Control / Sensors	12 Suspended Mount				
BW Batwing Optics AS Asymmetric Optics Note: Default Batwing Clear PC lens	DIM 0-10V 5% DIM1 0-10V 1% DTW Dim to Warm 1% TW Tunable white 1% BL Bluetooth	BL Midnight black - RAL9005 WH Pearly gate white - RAL9016 SG Shining silver gray - RAL7045 ----- RAL color code	EMD-LS08D-UNV-055* 8W Battery back up *Not available for 2ft lengths.	MSE-DCI-08 Occupancy/Daylight sensor (eco-sensor for Bluetooth driver only) MSB-DCI-08-BT5.0 Bluetooth sensor	ACS7 Aircraft Cable Suspension Kit, 2 pcs, up to 7ft ACS12 Aircraft Cable Suspension Kit, 2 pcs, up to 12ft SS7 Splicing Suspension Kit, 1 pcs, up to 7ft SS12 Splicing Suspension Kit, 1 pcs, up to 12ft				

Connectors	
Joiners**	Bluetooth Joiners***
CLC Straight Connector CL L Connector CT T Connector CX X Connector CV V Connector CY Y Connector **Joiner color finish will match fixture color (see Fixture Finish) unless otherwise specified.	BLCL L Bluetooth Connector BLCT T Bluetooth Connector BLCX X Bluetooth Connector BLCV V Bluetooth Connector BLCY Y Bluetooth Connector ***Only available in Black and White finishes.

HRZN25I | Pendant Ambient Luminaire

Dimensions:

Size	L	W	H
2FT	23.86"	2.48"	3.15"
3 FT	39.61"	2.48"	3.15"
4FT	47.48"	2.48"	3.15"
6FT	71.10"	2.48"	3.15"
8FT	94.72"	2.48"	3.15"


Continuous Run/Linking Info:

120VAC: Compatible up to 40ft
277VAC: Compatible up to 100ft.



Diffuser Roll (Sold Separately)
Optional continuous rolling lens for seamless continuous runs up to 40' is available.

Joiners:


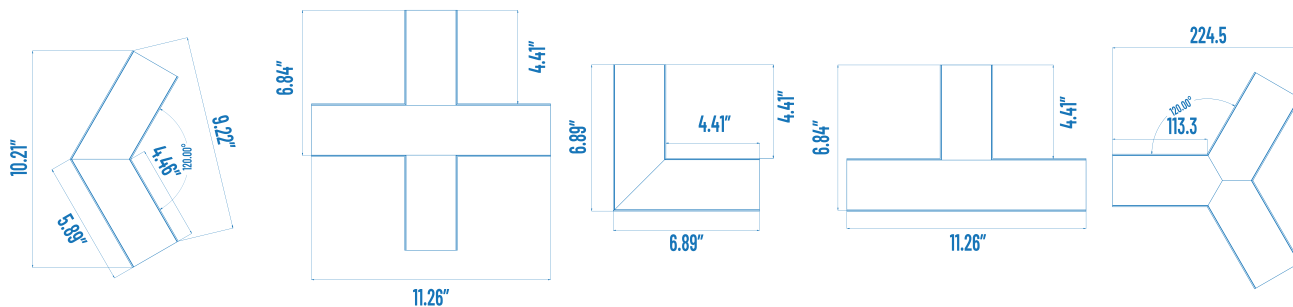


HRZN25I | Pendant Ambient Luminaire


Electrical Data:

Size	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
2FT	430	20	120	0.17
			208	0.10
			240	0.08
			277	0.07
3 FT	670	33	120	0.28
			208	0.16
			240	0.14
			277	0.12
4FT	850	40	120	0.33
			208	0.19
			240	0.17
			277	0.14
6FT	1300	60	120	0.50
			208	0.29
			240	0.25
			277	0.22
8FT	1700	80	120	0.67
			208	0.38
			240	0.33
			277	0.29


Controls

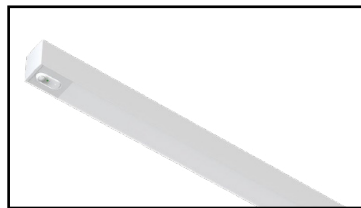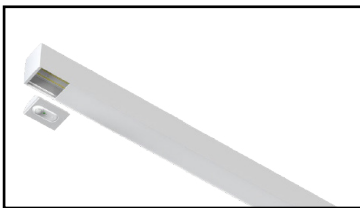

Mounting:



Additional Available Mounts:

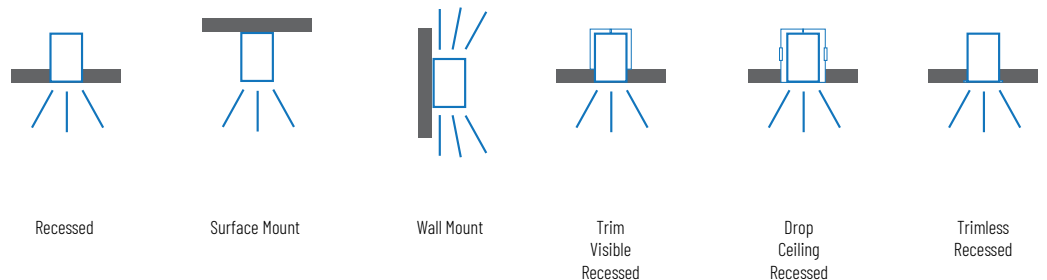

HRZN25I | Pendant Ambient Luminaire

Pattern Examples:



Continuous Run

Greater than
8FT, requires
straight
connector.



90 Degrees

Requires
L-Shaped
Joiner,
minimum
length 2' x 2'



U-Shape

Requires 2x
L-Shaped
Joiners,
minimum
length 2' x
2' x 2'



S-Shape


Requires 4x
L-Shaped
Joiners,
minimum
length 2' x 2'

Additional Available Designs:

Horizon Arrays:



Quadro



Hexo



Trio



Tero



Xero



Vero