

HRZN25I | Wall Mount Luminaire

Overview

Horizon 2.5 is a sleek, performance linear designed to amplify the atmosphere of any space it enters. Define your vibe with lighting solutions that buck tradition and turn heads. Contact your lighting solutions dealer today and start living.

Part #:

HRZN25I | Architectural Linear Luminaire

Lumens:

High Lumen:
650 Lm per ft.
5 W per ft.

Med Lumen:
488 Lm per ft.
3.75 W per ft.

Voltage:

Standard:
120-277 V

Color:

CCT:
2700K
3000K
3500K
4000K
5000K
Tunable White (2700K-5000K)
Bluetooth (2700K-5000K)
Dim to Warm (1800K-3000K)

CRI:
90

Dimming:

Standard:
0-10V - 5%

Options:
Dim to Warm,
Tunable
Bluetooth

Lifetime:

Standard:
L80 > 50,000 Hrs.

Operating Temperature:

Standard:
-4°F to 104°F

Finishes:

Midnight RAL 9005	Pearly Gate RAL 9016	Silver Gray RAL 7045


Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



HORIZON 2.5I

Indirect Linear - Wall Mount

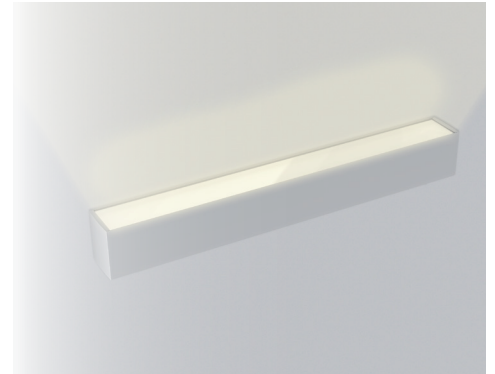

Features:

Your size, your way
Choose from standard lengths or customize to the foot.

Bend the light to your whims

Specific lumen outputs, 5 CCT + Dim to warm, dimming options, and 90 CRI standard.


Specification grade construction

Extruded aluminium housing and die cast endcaps. No shortcuts on material.

Lens:




Indirect Batwing PC lens




Asymmetric

Optics:



Cross Section:

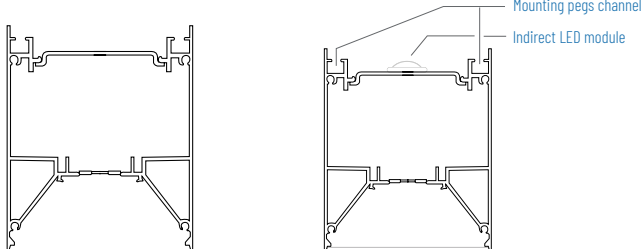

Type:	Project:	Submitted by:	Date:
Ordering information:			

HRZN25I | Wall Mount Luminaire

Example: HRZN25 I 6 WM M 940 BW DIM BL

Ordering Guide:
Use the buttons below to build out a product number.

Select one option per numbered section. if a preferred option is not here, please contact your local SPRNG representative for more information.

Linear Body				Output and color		
1 Series	2 Light Style	3 Total Length ¹	4 Mounting	5 Output ²	6 Voltage	7 CCT/CRI
HRZN25 Horizon 2.5 - Wall Mount Linear	I Indirect - Downlight	Individual Fixture Length or Continuous Run (if over 8FT) (Please specify to the FT). ¹ NOTE: Individual fixtures come in 2', 3', 4', 6' & 8' lengths.	WM Wall Mount	H (High Indirect) 650 Lumens / 5 Watts per FT M (Medium Indirect) 488 Lumens / 3.75 Watts per FT CL Custom Lumens (Please specify) ² CW Custom Watts (Please specify) ² ² Please consult your local SPRNG representative for details on Custom Lumens &/or Watts.	BLANK 120V-277V	927 90 CRI - 2700K 930 90 CRI - 3000K 935 90 CRI - 3500K 940 90 CRI - 4000K 950 90 CRI - 5000K 9FSK 90 CRI - Tunable White/Bluetooth (2700K - 5000K) 9DTW 90 CRI - Dim to Warm (1800K - 3000K)

Hard Optics		Dimming		Finishing		Backups & Controls	
8 Indirect Optics	9 Dimming Driver	10 Finish	11 Emergency ³	12 Controls	13 Sensors		
BW Batwing Optics - Standard AS Asymmetric Optics	DIM 0-10V 5% DTW Dim to Warm 1% TW Tunable white 1% BL Bluetooth	BL Midnight black - RAL9005 WH Pearly gate white - RAL9016 SG Shining silver gray - RAL7045 ----- RAL color code	BLANK No Emergency Backup EM 8W Emergency Battery backup ³ GE Generator emergency circuit ³ ³ Note: Continuous runs of over 8FT might require more than one Emergency Backup. Please specify if so. Example: 2EM. GE Generator emergency circuit (2GE means 2 fixtures in the generator emergency circuit)	BLANK No controls. BLF Bluetooth controls. AV Avian-On controls. CS Custom controls.	BLANK NO Sensor BS Bluetooth sensor ES Occupancy/Daylight sensor (eco-sensor for Bluetooth driver only)		

HRZN25I | Wall Mount Luminaire

Dimensions:

Size	L	W	H
2FT	23.86"	2.48"	3.15"
3 FT	39.61"	2.48"	3.15"
4FT	47.48"	2.48"	3.15"
6FT	71.10"	2.48"	3.15"
8FT	94.72"	2.48"	3.15"

Continuous Run/Linking Info:

120VAC: Compatible up to 40ft
277VAC: Compatible up to 100ft.



Diffuser Roll (Sold Separately)
Optional continuous rolling lens for seamless continuous runs up to 40' is available.



Electrical Data:

Size	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
2FT	430	20	120	0.17
			208	0.10
			240	0.08
			277	0.07
3 FT	670	33	120	0.28
			208	0.16
			240	0.14
			277	0.12
4FT	850	40	120	0.33
			208	0.19
			240	0.17
			277	0.14
6FT	1300	60	120	0.50
			208	0.29
			240	0.25
			277	0.22
8FT	1700	80	120	0.67
			208	0.38
			240	0.33
			277	0.29

Type:	Project:	Submitted by:	Date:
Ordering information:			

HRZN25I | Wall Mount Luminaire

Controls

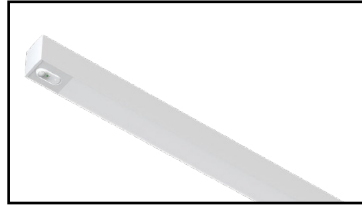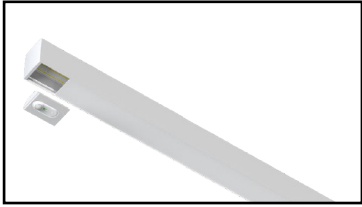

Mounting:




Wall Mount


Additional Available Mounts:



Surface Mount



Dry wall
Pendant
Mount



Drop Ceiling
Pendant
Mount



Recessed



Trim
Visible
Recessed



Drop
Ceiling
Recessed



Trimless
Recessed