

PLANE | Architectural Recessed Troffer

Overview

The PLANE recessed troffer enhances commercial and corporate office environments with style and dependability, featuring 4 power & 5 CCT options, high efficacy, and controls options.

Part #:

PLANE | Architectural Recessed Troffer

Lumens:

2x2:	2x4:
4,320 Lm max.	5,805 Lm max.
32 W max.	43 W max.

Color:

CCT:	CRI:
2700K	90
3000K	
3500K	
4000K	
5000K	

Voltage:

Standard:
120-277 V

Dimming:

Standard:
0-10V

Lifetime:

Standard:
L70 > 100,000 Hrs.

Operating Temperature:

Standard:
-4°F to 122°F

Finishes:

Pearly Gate
RAL 9016



PLANE

Architectural Recessed Troffer




Features:

Dependable and stylish.
2ft by 2ft and 2ft by 4ft sizes standard.

Bend the light to your whims
Specific lumen outputs, 5 CCT + 90 CRI standard.


Specification grade construction
Extruded aluminium housing with a long lasting white finish and optical polystyrene lens. No shortcuts on material.

Mounting:

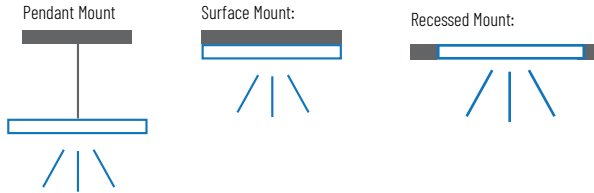


Dimensions:

2x2

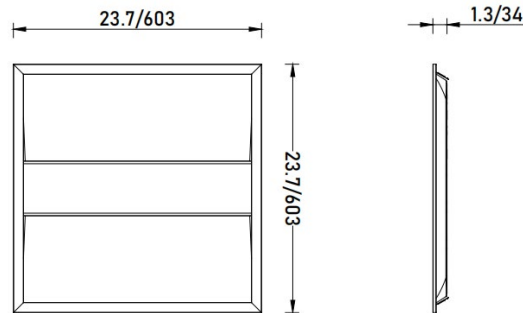

2x4

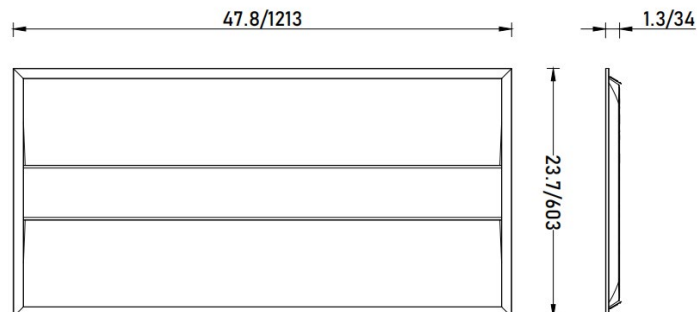

PLANE | Architectural Recessed Troffer

Example: PLANE 22 SM 3500 D 940 WH

Ordering Guide:
Use the buttons below to build out a product number.

Select one option per numbered section. if a preferred option is not here, please contact your local SPRNG representative for more information.

Troffer Body			Output and color			
1 Series	2 Size	3 Mounting	4 Output	5 Voltage	6 Dimming	7 CCT/CRI
PLANE Architectural Recessed Troffer	22 2ft by 2ft 24 2ft by 4ft	S Suspended mount (7ft max). SM* Surface mount to dry wall. RM Recessed mount. *Note: Only compatible with Dry wall ceilings.	4300 4,320 Lumens / 32 Watts (2x2 only)	BLANK 120V-277V	D 0-10V	927 90 CRI - 2700K
			3500 3,510 Lumens / 26 Watts (2x2 only)			930 90 CRI - 3000K
			2500 2,565 Lumens / 19 Watts (2x2 only)			935 90 CRI - 3500K
			2100 2,160 Lumens / 16 Watts (2x2 only)			940 90 CRI - 4000K
			5800 5,805 Lumens / 43 Watts (2x4 only)			950 90 CRI - 5000K
			4800 4,860 Lumens / 36 Watts (2x4 only)			
			4000 4,050 Lumens / 30 Watts (2x4 only)			
		2900 2,970 Lumens / 22 Watts (2x4 only)				
Finishing		Emergency Backup	Power Cable	Controls		
8 Finish	9 Emergency Backup	10 Cord Set	11 Controls			
WH Pearly gate white - RAL9016	BLANK No Backup EMD-PA08D-UNV-055 8W Emergency Backup	CS3F5 18/2 MC Whip with LV Dimming wires & 3/8" Connector. CS3F6 18/2 MC Whip with LV Dimming wires & 3/8" Connector.	BLANK No controls MSB-DCI-08-BT5.0 Bluetooth wireless motion sensor. MS-DCI-08 Standalone basic motion sensor. RM06 Remote control for standalone motion sensor.			


Performance Data

Series Number	Power Setting	Wattage	Lumens	CCT
PLANE 22 LS43	Max	32 W	4,320 Lm	2700K 3000K 3500K 4000K 5000K
	High	26 W	3,510 Lm	
	Medium	19 W	2,565 Lm	
	Low	16 W	2,160 Lm	
PLANE 24 LS58	Max	43 W	5,805 Lm	
	High	36 W	4,860 Lm	
	Medium	30 W	4,050 Lm	
	Low	22 W	2,970 Lm	

Mounting Overview



Surface Mount Kit

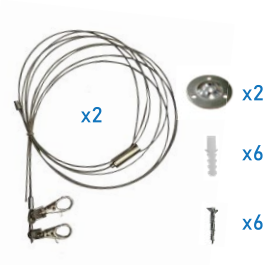

Suspension Mount Kit



Dry Wall Kit