

## RING25 | Architectural Ring Light

### Overview

The RING blends modern form with versatile performance to elevate any space. Designed for flexibility, it offers several mounting options and direct and indirect lighting capabilities to create balanced, comfortable illumination, clean architectural presence and adaptable lighting design for contemporary commercial interiors.

### Part #:

## RING25 | Architectural Ring Light

### Lumens:

2ft Diameter: 3,800 Lm 40 W	3ft Diameter: 5,700 Lm 60 W	4ft Diameter: 7,200 Lm 80 W
-----------------------------------	-----------------------------------	-----------------------------------

### Color:

CCT:  
2700K  
3000K  
3500K  
4000K  
5000K  
Tunable White (2700K-5000K)  
Bluetooth (2700K-5000K)  
Dim to Warm (3000K-3500K)

### Voltage:

Standard:  
120-277 V

### Dimming:

Standard:  
0-10V - 5%


### Lifetime:

Standard:  
L70 > 100,000 Hrs.

### Operating Temperature:

Standard:  
-4°F to 104°F

### Finishes:




Custom color available\*

\*All custom color requests must be call to order and will affect leadtimes.  
Accommodation for RAL color code is available.



# RING25

## Round Light

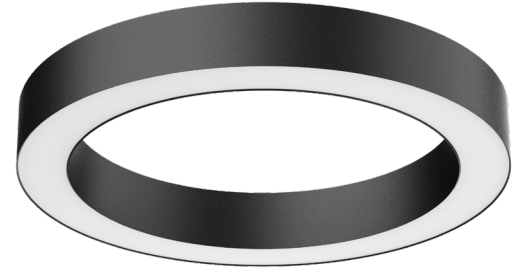

### Features:

Your size, your way  
Available in 2ft, 3ft, and 4ft diameters.


Bend the light to your whims  
Configurable options for indirect / direct combinations  
Configurable power output (3 settings)

Aluminum housing  
Designed for minimizing light leak and high performance. No shortcuts on material.

### Mounting


Pendant Mount:

Suspended Mount:



## Dimensions:

Size	D (Diameter)	W (Width)	H (Height)
2ft	23.62" (600mm)	2.50" (63.5mm)	3.15" (80mm)
3ft	35.43" (900mm)		
4ft	47.24" (1200mm)		

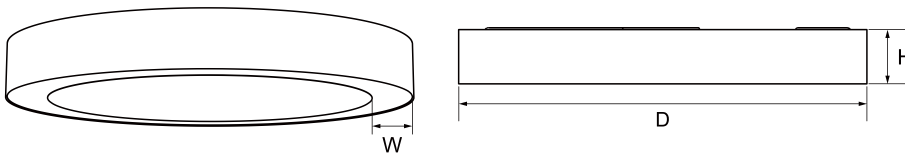

Type:	Project:	Submitted by:	Date:
Ordering information:			

# RING25 | Architectural Ring Light

Example: RING25 D 2 SM X H 930 F W

Ordering Guide:  
Use the buttons below to build out a product number.

Select one option per numbered section. if a preferred option is not here, please contact your local SPRNG representative for more information.

Fixture Body				Output and color			
1 Series	2 Light Style	3 Diameter	4 Mounting <sup>2</sup>	5 Distribution	6 Direct Output <sup>3</sup>	7 Voltage	7 CCT/CRI
<b>RING25</b> Drum - Architectural Round Light	<b>D</b> Direct - Downlight	<b>2</b> 2ft Diameter <b>3</b> 3ft Diameter <b>4</b> 4ft Diameter	<b>AC G</b> Aircraft Cable to grid (15/16", 9/16" FLAT thick) <b>AC JB</b> Aircraft Cable to J-Box <sup>2</sup> Note: Standard Aircraft Cable lengths are 7ft and 12ft. Please specify custom lengths to the foot.	<b>37</b> 30% Indirect, 70% Direct <b>55</b> 50% Indirect, 50% Direct <b>73</b> 70% Indirect, 30% Direct	<b>H (High)</b> 3,800 Lm / 40W (2ft Diameter) 5,700 Lm / 60W (3ft Diameter) 7,200 Lm / 80W (4ft diameter) <b>M (Medium)</b> 3,000 Lm / 30W (2ft diameter) 4,500 Lm / 45W (3ft Diameter) 6,000 Lm / 60W (4ft diameter) <b>L (Low)</b> 2,100 Lm / 20W (2ft diameter) 3,150 Lm / 30W (3ft Diameter) 4,200 Lm / 40W (4ft diameter) <b>CL</b> Custom Lumens (Please specify) <sup>3</sup> <b>CW</b> Custom Watts (Please specify) <sup>3</sup> <sup>3</sup> Please consult your local SPRNG representative for details on Custom Lumens &/or Watts.	<b>BLANK</b> 120V-277V	<b>927</b> 90 CRI - 2700K <b>930</b> 90 CRI - 3000K <b>935</b> 90 CRI - 3500K <b>940</b> 90 CRI - 4000K <b>930</b> 90 CRI - 3000K

Dimming	Finishing	Backups & Controls
8 Dimming Driver	9 Finish	10 Emergency
<b>DIM</b> 0-10V 5%	<b>BL</b> Midnight black - RAL9005 <b>WH</b> Pearly gate white - RAL9016 ----- RAL color code	<b>BLANK</b> No Emergency Backup <b>EM</b> 8W Emergency Battery backup

## RING25 | Architectural Ring Light

### Performance Data

Size	Setting	Wattage	2700K (90CRI)		3ft 3000K (90CRI)		3500K (90CRI)		4000K (90CRI)		5000K (90CRI)	
			Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
2ft	High	40W	3,200 Lm	80 Lm/W	3,400 Lm	80 Lm/W	3,600 Lm	90 Lm/W	3,800 Lm	95 Lm/W	3,600 Lm	90 Lm/W
	Medium	30W	2,550 Lm	85 Lm/W	2,700 Lm	90 Lm/W	2,850 Lm	95 Lm/W	3,000 Lm	100 Lm/W	2,850 Lm	95 Lm/W
	Low	20W	1,800 Lm	90 Lm/W	1,900 Lm	95 Lm/W	2,000 Lm	100 Lm/W	2,100 Lm	105 Lm/W	2,000 Lm	100 Lm/W
3ft	High	60W	4,800 Lm	80 Lm/W	5,100 Lm	85 Lm/W	5,400 Lm	90 Lm/W	5,700 Lm	95 Lm/W	5,400 Lm	90 Lm/W
	Medium	45W	3,825 Lm	85 Lm/W	4,050 Lm	90 Lm/W	4,275 Lm	95 Lm/W	4,500 Lm	100 Lm/W	4,275 Lm	95 Lm/W
	Low	30W	2,700 Lm	90 Lm/W	2,550 Lm	85 Lm/W	3,000 Lm	100 Lm/W	3,150 Lm	105 Lm/W	3,000 Lm	100 Lm/W
4ft	High	80W	6,400 Lm	80 Lm/W	6,400 Lm	80 Lm/W	7,200 Lm	90 Lm/W	7,200 Lm	95 Lm/W	7,200 Lm	90 Lm/W
	Medium	60W	5,100 Lm	85 Lm/W	5,400 Lm	90 Lm/W	5,700 Lm	95 Lm/W	6,000 Lm	100 Lm/W	5,700 Lm	95 Lm/W
	Low	40W	3,600 Lm	90 Lm/W	3,400 Lm	85 Lm/W	4,000 Lm	100 Lm/W	4,200 Lm	105 Lm/W	4,000 Lm	100 Lm/W

### Electrical Data:

Size	Number of Drivers	Driver Current (mA)	Wattage	Current (Amps)			
				120V	208V	240V	277V
2FT	1	820	40W	0.33	0.19	0.17	0.14
			30W	0.25	0.14	0.13	0.11
			20W	0.17	0.10	0.08	0.07
3 FT	1	1260	60W	0.50	0.29	0.25	0.22
			45W	0.38	0.22	0.19	0.16
			30W	0.25	0.14	0.13	0.11
4FT	1	1650	80W	0.67	0.38	0.33	0.29
			60W	0.50	0.29	0.25	0.22
			40W	0.33	0.19	0.17	0.14