

## CYNS | Wall Mount Slim Cylinder Light

### Overview

A series of precision-engineered architectural cylinders, available in 1.5" and 2.5" diameters with indirect and direct distribution capabilities. Wall mount configurations deliver clean visual impact with optical precision.

### Part #:

## CYNS | Wall Mount Slim Cylinder Light

### Lumens:

510 Lm (6 W)

### Color:

CCT: (Standard)

2700K

3000K

3500K

4000K

5000K

CRI:

90

### Voltage:

Standard:

120-277V

### Dimming:

0-10V, Dim to 1% (Flicker Free)

TRIAC (Flicker Free)

ELV (Flicker Free)

### Lifetime:

Standard:

L70 > 100,000 Hrs.

### Operating Temperature:

Standard:

-4°F ~ 104°F

### Finishes:



Phantom black



Wispy white



Custom color available\*

\*All custom color requests must be call to order and will affect leadtimes.  
Accommodation for RAL color code is available.



# CYNS

## Wall Mount - 1.5"

### Features:

Bend the light to your whims


Three In One dimming driver allows for 0-10V, TRIAC, and ELV dimming.  
Choose from several beam angle options (24°, 36°, and 50°).

Aluminum housing and performance light engine

High quality, precision housing paired with a long lasting light engine.

### Trim:


Standard:



Standard Vortex Baffle

### Lens:

Standard



Soft Lens

### Optics:


Photometry:



24° Narrow




36° Medium Narrow




50° Wide

### Also available in:



Cord Pendant  
Mount

## Dimensions:

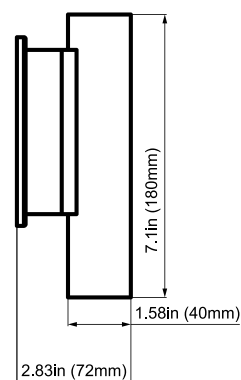



|                       |          |               |       |
|-----------------------|----------|---------------|-------|
| Type:                 | Project: | Submitted by: | Date: |
| Ordering information: |          |               |       |

CYNS | Wall Mount Slim Cylinder Light

Example: CYNS D 15R WM 06 SD36 950K BK

Ordering Guide:  
Use the buttons below to build out a product number.

Select one option per numbered section. If a preferred option is not here, please contact your local SPRNG representative for more information.

| Body and model                                                    |                                          |                                         |                                     | Output / CCT / Electrical                                                                     |                                                                                                                                 |                                                                                                                                                                                                                   |                                      |
|-------------------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| 1 Series                                                          | 2 Light Style                            | 3 Size                                  | 4 Mounting                          | 5 Power                                                                                       | 6 Distribution                                                                                                                  | 7 CCT/CRI                                                                                                                                                                                                         | 8 Voltage                            |
| <div>CYNS</div> <div>Cyns -<br/>Suspended Slim<br/>Cylinder</div> | <div>D</div> <div>Direct Downlight</div> | <div>15R</div> <div>1.5" Diameter</div> | <div>WM</div> <div>Wall Mount</div> | <div>06</div> <div>510 Lumens / 6W</div> <div>Universal dimming (0-10V, TRIAC, and ELV)</div> | <div>SD 24</div> <div>Narrow - 24°</div> <div>SD 36</div> <div>Medium Narrow - 36°</div> <div>SD 50</div> <div>Wide - 50°</div> | <div>927K</div> <div>90 CRI - 2700K</div> <div>930K</div> <div>90 CRI - 3000K</div> <div>935K</div> <div>90 CRI - 3500K</div> <div>940K</div> <div>90 CRI - 4000K</div> <div>950K</div> <div>90 CRI - 5000K</div> | <div>BLANK</div> <div>120-277V</div> |

| Finish                                                                                                                                                                                  | Hard Optics                                     | Battery Backup                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9 Fixture Finish                                                                                                                                                                        | 10 Lens                                         | 11 Emergency Backup                                                                                                                                                                                                           |
| <div>BK</div> <div>Phantom black</div> <div>WH</div> <div>Whisper white</div> <div>-----*</div> <div>RAL color code</div> <div>*Custom color requires MOQ and advanced leadtimes.</div> | <div>BLANK</div> <div>Standard clear lens</div> | <div>BLANK</div> <div>No Emergency Backup</div> <div>EMD-RH08D-UNV-170-BK</div> <div>Emergency Battery backup (8W), Black Finish</div> <div>EMD-RH08D-UNV-170-WH</div> <div>Emergency Battery backup (8W), White Finish</div> |


|                       |          |               |       |
|-----------------------|----------|---------------|-------|
| Type:                 | Project: | Submitted by: | Date: |
| Ordering information: |          |               |       |

CYNS | Wall Mount Slim Cylinder Light

Performance Data:

| Power | Size   | 2700K (90 CRI) |         | 3000K (90 CRI) |         | 3500K (90 CRI) |         | 4000K (90 CRI) |         | 5000K (90 CRI) |         |
|-------|--------|----------------|---------|----------------|---------|----------------|---------|----------------|---------|----------------|---------|
|       |        | Lumens         | LPW     | Lumens         | LPW     | Lumens         | LPW     | Lumens         | LPW     | Lumens         | LPW     |
| 6W    | 1.5 IN | 480 LM         | 80 LM/W | 480 LM         | 80 LM/W | 480 LM         | 80 LM/W | 510 LM         | 85 LM/W | 510 LM         | 85 LM/W |

Mounting:



Wall Mount