

CYNS | Wall Mount Slim Cylinder Light

Overview

A series of precision-engineered architectural cylinders, available in 1.5" and 2.5" diameters with indirect and direct distribution capabilities. Wall mount configurations deliver clean visual impact with optical precision.

Part #:

CYNS | Wall Mount Slim Cylinder Light

Lumens:

1350 Lm (15 W)

Color:

CCT: (Standard)

2700K

3000K

3500K

4000K

5000K

CRI:

90

Voltage:

Standard:

120-277V

Dimming:

0-10V, Dim to 1% (Flicker Free)

TRIAC (Flicker Free)

ELV (Flicker Free)

Lifetime:

Standard:

L70 > 100,000 Hrs.

Operating Temperature:

Standard:

-4°F - 104°F

Finishes:

Phantom black

Wispy white

Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



CYNS

Wall Mount - 2.5"

Features:

Your style, your way

Choose from numerous mounting options and styles to suit your needs.

Bend the light to your whims

Three In One dimming driver allows for 0-10V, TRIAC, and ELV dimming.


Choose from several beam angle options (24°, 36°, and 50°).

Aluminum housing and performance light engine

High quality, precision housing paired with a long lasting light engine.

Trim:


Standard:



Standard Vortex Baffle

Lens:

Standard



Soft Lens

Optics:


Photometry:



24° Narrow




36° Medium Narrow




50° Wide

Mounting:



Wall Mount

Dimensions:

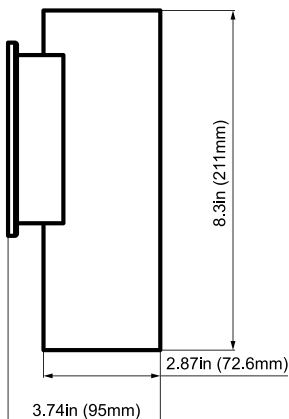



Type:	Project:	Submitted by:	Date:
Ordering information:			

CYNS | Wall Mount Slim Cylinder Light

Example: CYNS D 25R WM 15 SD36 950K BK

Ordering Guide:
Use the buttons below to build out a product number.

Select one option per numbered section. If a preferred option is not here, please contact your local SPRNG representative for more information.

Body and model				Output / CCT / Electrical			
1 Series	2 Light Style	3 Size	4 Mounting	5 Power	6 Distribution	7 CCT/CRI	8 Voltage
CYNS Cyns - Suspended Slim Cylinder	D Direct Downlight	25R 2.5" Diameter	WM Wall Mount	15 1,350 Lumens / 15W Universal dimming (0-10V, TRIAC, and ELV)	SD 24 Narrow - 24° SD 36 Medium Narrow - 36° SD 50 Wide - 50°	927K 90 CRI - 2700K 930K 90 CRI - 3000K 935K 90 CRI - 3500K 940K 90 CRI - 4000K 950K 90 CRI - 5000K	BLANK 120-277V

Finish	Hard Optics	Battery Backup
9 Fixture Finish	10 Lens	11 Emergency Backup
BK Phantom black WH Whisper white -----* RAL color code *Custom color requires MOQ and advanced leadtimes.	BLANK Standard clear lens	BLANK No Emergency Backup EMD-RH08D-UNV-170-BK Emergency Battery backup (8W), Black Finish EMD-RH08D-UNV-170-WH Emergency Battery backup (8W), White Finish

Type:	Project:	Submitted by:	Date:
Ordering information:			

CYNS | Wall Mount Slim Cylinder Light

Performance Data:

Power	Size	2700K (90 CRI)		3000K (90 CRI)		3500K (90 CRI)		4000K (90 CRI)		5000K (90 CRI)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
15W	2.5 IN	1275 LM	85 LM/W	1275 LM	85 LM/W	1275 LM	85 LM/W	1350 LM	90 LM/W	1350 LM	90 LM/W