

CYNS | Pendant Ambient Luminaire

Overview

A series of precision-engineered architectural cylinders, available in 1.5" and 2.5" diameters. Surface and pendant mount configurations deliver clean visual impact with optical precision.

Part #:

CYNS | Pendant Cylinder

Lumens:

1350 Lm (15 W)

Color:

CCT: (Standard)

2700K

3000K

3500K

4000K

5000K

CRI:

90

Voltage:

Standard:

120-277V

Dimming:

0-10V, Dim to 1% (Flicker Free)

TRIAC (Flicker Free)

ELV (Flicker Free)

Lifetime:

Standard:

L70 > 100,000 Hrs.

Operating Temperature:

Standard:

-4°F - 104°F

Finishes:

Phantom black

Wispy white

Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



CYNS

Suspended Mount - 2.5"

Features:

Bend the light to your whims

Three In One dimming driver allows for 0-10V, TRIAC, and ELV dimming.

Choose from several beam angle options (24°, 36°, and 50°).


Aluminum housing and performance light engine

High quality, precision housing paired with a long lasting light engine.



Trim:


Standard:



Standard Vortex Baffle

Lens:

Standard



Soft Lens

Optics:


Photometry:



24° Narrow




36° Medium Narrow




50° Wide

Also available in:



Wall Mount

Dimensions:

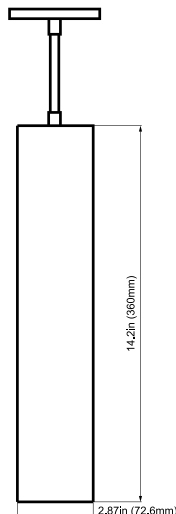

Type:	Project:	Submitted by:	Date:
Ordering information:			

CYNS | Pendant Ambient Luminaire

Example: CYNS D 25R PM 15 SD36 950K BK CP5G4

Ordering Guide:
Use the buttons below to build out a product number.

Select one option per numbered section. If a preferred option is not here, please contact your local SPRNG representative for more information.

Body and model				Output / CCT / Electrical			
1 Series	2 Light Style	3 Size	4 Mounting	5 Power Universal dimming (0-10V, TRIAC, and ELV)	6 Distribution	7 CCT/CRI	8 Voltage
CYNS Cyns - Suspended Slim Cylinder	D Direct Downlight	25R 2.5" Diameter	PM Pendant Mount	15 1,350 Lumens / 15W	SD 24 Narrow - 24° SD 36 Medium Narrow - 36° SD 50 Wide - 50°	927K 90 CRI - 2700K 930K 90 CRI - 3000K 935K 90 CRI - 3500K 940K 90 CRI - 4000K 950K 90 CRI - 5000K	BLANK 120-277V

Finish	Hard Optics	Mounting	Battery Backup
9 Fixture Finish ¹	10 Lens	11 Mounting Kit ²	12 Emergency Backup
BK Phantom black WH Whisper white -----* RAL color code	BLANK Standard clear lens	CPBK Cable Pendant mount kit, Black finish (specify length). CPSG Cable Pendant mount kit, Silver Gray finish (specify length). CPWH Cable Pendant mount kit, White finish (specify length).	BLANK No Emergency Backup EMD-RH08D-UNV-170-BK Emergency Battery backup (8W), Black Finish EMD-RH08D-UNV-170-WH Emergency Battery backup (8W), White Finish

¹ Power cable and mounting kits will match cylinder finish.

² Custom color requires MOQ and advanced leadtimes.

²Please specify length to the FT.

Type:	Project:	Submitted by:	Date:
Ordering information:			

CYNS | Pendant Ambient Luminaire

Performance Data:

Power	Size	2700K (90 CRI)		3000K (90 CRI)		3500K (90 CRI)		4000K (90 CRI)		5000K (90 CRI)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
15W	2.5 IN	1275 LM	85 LM/W	1275 LM	85 LM/W	1275 LM	85 LM/W	1350 LM	90 LM/W	1350 LM	90 LM/W

Mounting:

